



Extract from our online catalogue:

crm+600/IU/TC/E

Current to: 2015-01-12

microsonic gmbh, hauert 16, d-44227 dortmund, telephone: +49 231 975151-0, fax: +49 231 975151-51, e-mail: info@microsonic.de
microsonic® is a registered trademark of microsonic GmbH. All rights reserved.

Wear-resistant PEEK film protects the sensor membrane from chemicals, contamination and caking.



Highlights

- › **Ultrasonic transducer protected by PEEK film** ::: for simple cleaning and high resistance to wear
- › **Stainless-steel housing**
- › **Digital display with direct measured value output in mm/cm or %**
- › **Numeric configuration of the sensor using digital display** ::: permits the complete advance configuration of the sensor
- › **Automatic synchronisation and multiplex operation** ::: for simultaneous operation of up to ten sensors in close quarters

Basics

- › **1 or 2 switching outputs in pnp variant**
- › **Analogue output 4–20 mA and 0–10 V** ::: with automatic switching between current and voltage outputs
- › **5 detection ranges with a measurement range of 30 mm to 8 m**
- › **microsonic Teach-in using T1 or T2 buttons**
- › **0.025 mm to 2.4 mm resolution**
- › **Temperature compensation**
- › **9–30 V operating voltage**
- › **LinkControl** ::: for configuration of sensors from a PC

Description

Sensor membrane with wear-resistant protective film

In many filling processes, spray on the sensor membrane simply cannot be avoided. These sprays often harden so that after longer periods of operation contamination can only be removed from the sensor membrane by mechanical means. The new protective film of the crm+ sensors now makes it easy to remove caked-on soiling, such as hardened casting compound and cement spatter.

The protective film is also highly resistant to corrosive media. The threaded sleeve is made of 1.4571 stainless steel.



TouchControl with LED display - Wear-resistant PEEK protective film

There are three output stages available for all five detection ranges:



1 switching output in pnp switching technology



2 switching outputs in pnp switching technology



1 analogue output 4–20 mA and 0–10 V

The crm+ sensors with switching output have three operating modes:

- > Single switching point
- > Two-way reflective barrier
- > Window mode

With TouchControl

all configuration can be done right at the sensor. The easily legible three-digit LED display continually shows the current distance value and automatically switches between millimetre and centimetre displays.

Setting a switching or analogue output

can optionally be carried out by numeric input of the desired distance values, or using a teach-in procedure. This permits the user to select the configuration method preferred.

The crm+ sensors support synchronisation and multiplex operation and have extensive parameterisation options via LinkControl.

For detailed information, please see at mic+ sensors.

LinkControl

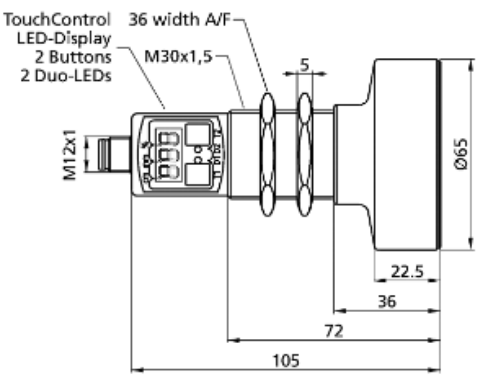
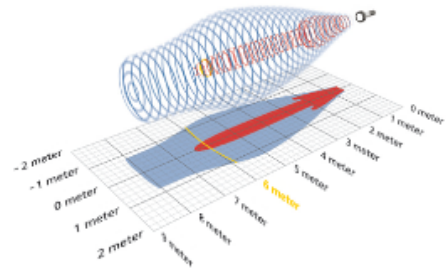


consists of the LinkControl adapter and the LinkControl software and facilitates the configuration of the crm+ sensors via

a PC or laptop with any conventional Windows® operating system.



Sensor connected to the PC via LCA-2 for programming

crm+600/IU/TC/E

scale drawing	detection zone
	
 1 x analogue 4-20 mA + 0-10 V	 8,000 mm
<p>operating range</p> <p>design</p> <p>operating mode</p> <p>particularities</p>	<p>600 - 6,000 mm</p> <p>cylindrical M30</p> <p>analogue distance measurements</p> <p>high chemical resistance</p> <p>stainless steel version</p> <p>display</p>
<p>ultrasonic -specific</p> <p>means of measurement</p> <p>transducer frequency</p> <p>blind zone</p> <p>operating range</p> <p>maximum range</p> <p>angle of beam spread</p> <p>resolution/sampling rate</p> <p>reproducibility</p> <p>accuracy</p>	<p>echo propagation time measurement</p> <p>80 kHz</p> <p>600 mm</p> <p>6,000 mm</p> <p>8,000 mm</p> <p>please see graphics detection zone</p> <p>0.18 mm</p> <p>± 0.15 %</p> <p>± 1 % (temperature drift internally compensated)</p>
<p>electrical data</p> <p>operating voltage U_B</p> <p>voltage ripple</p> <p>no-load current consumption</p> <p>type of connection</p>	<p>9 - 30 V d.c., reverse polarity protection</p> <p>± 10 %</p> <p>≤ 80 mA</p> <p>5-pin M12 initiator plug</p>

crm+600/IU/TC/E

outputs	
output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
response time	240 ms
delay prior to availability	< 450 ms
inputs	
input 1	com input synchronisation input
housing	
material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	coated with PEEK film, PTFE O-ring
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	210 g
further versions	cable connection (on request)
technical features/characteristics	
temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
synchronization	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	high chemical resistance stainless steel version display
documentation (download)	
pin assignment	