


Profile

- Accuracy class $\pm 0.1^\circ$
- Status LED display
- Works with MBR100 magnetic tape ring
- Reading distance ≤ 0.4 mm
- Signal period 1000 μ m
- Output circuit sin/cos 1 V_{SS}
- Robust metal housing

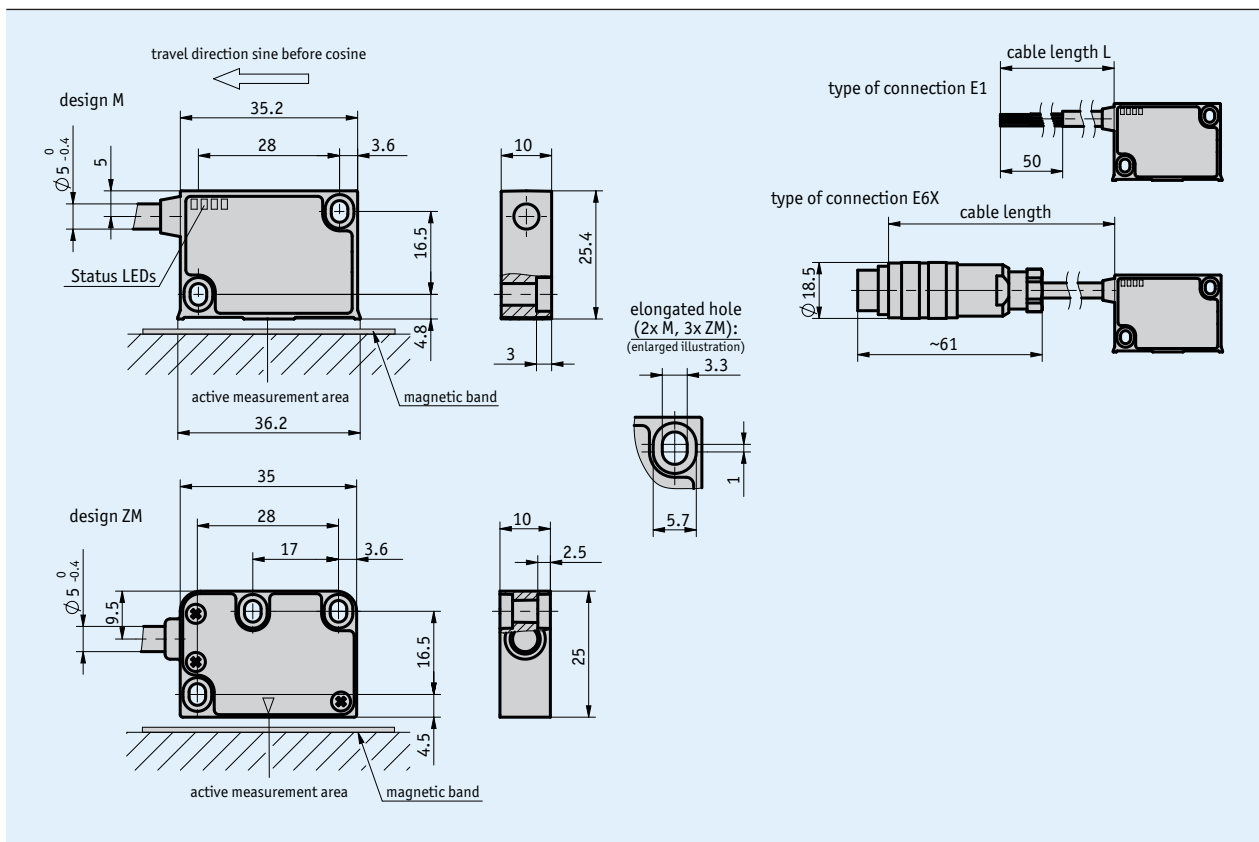


Mechanical data

Feature	Technical data	Additional information
Housing	zinc die-cast/aluminum	M design
	zinc die-cast	ZM design
Sensor/ring reading distance	0.1 ... 0.4 mm	reference signal O, IA, ID
	0.1 ... 0.2 mm	reference signal RB, RD
Cable sheath	PUR, suitable for drag-chain use	6, 8-wire $\phi_{5-0.4}$ mm

Electrical data

Feature	Technical data	Additional information
Operating voltage	10.5 ... 30 V DC	reverse polarity protected
	5 V DC $\pm 5\%$	no reverse polarity protection
Current consumption	<25 mA	at 24 V DC
	<50 mA	at 5 V DC
Output signals	sin, /sin, cos, /cos, index, /index	
Output voltage	1 V _{pp} $\pm 10\%$	at 0 ... 70 °C, 120 Ω terminal resistance
Output impedance	0 Ω (R _{Load} > 75 Ω)	short-circuit proof
Signal period	1000 μ m	
Offset voltage	2.5 V, ± 100 mV	sine/cosine mean to GND (10.5 ... 30 V DC)
	VCC/2 ± 100 mV	sine/cosine mean to GND (5 V DC)
Phasing	90° $\pm 1^\circ$, $\pm 3^\circ$ (20 kHz)	sin/cos
	45°	sin (reference signal)
	135°	cos (reference signal)
Real-time requirement	speed-proportional signal output	
Type of connection	open cable end	
	plug connector	7/8-pole

Signal pattern

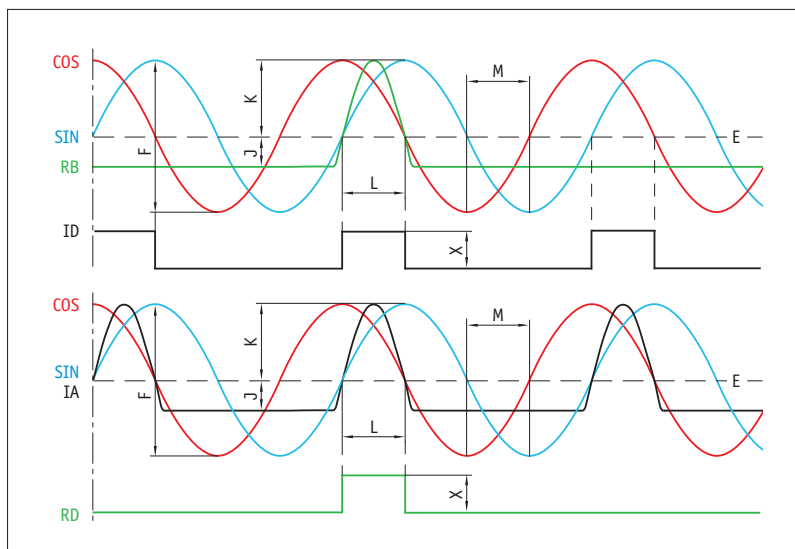

E: Reference voltage 2.5 V
 F: 1 V_{SS} $\pm 10\%$
 J: ≥ 0.2 V
 K: ≥ 0.3 V
 L: 100° $\pm 20\%$
 M: 90° $\pm 1.0^\circ / \pm 3^\circ$ (25 kHz)
 X: 1 V_{SS}

System data

Feature	Technical data	Additional information
System accuracy	$\leq 1\%$	based on graduation period
Repeat accuracy	1 μ m	
Measuring range	∞	
Circumferential speed	≤ 20 m/s	

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-10 ... 70 °C	
Storage temperature	-30 ... 80 °C	
Relative humidity	100 %	condensation admissible
EMC	EN 61000-6-2	interference resistance / immission
	EN 61000-6-4	emitted interference / emission
Protection category	IP67	EN 60529
Shock resistance	500 m/s ² , 11 ms	EN 60068-2-27
Vibration resistance	200 m/s ² , 50 Hz ... 2 kHz	EN 60068-2-6

Pin assignment

Without reference signal

Signal	E1	E6X
GND	black	1
sin	red	2
/sin	orange	3
cos	yellow	4
/cos	green	5
+UB	brown	6
nc		7


With reference signal

Signal	E1	E6X
sin	red	1
cos	yellow	2
index	blue	3
+UB	brown	4
GND	black	5
/sin	orange	6
/cos	green	7
/index	violet	8

Hint for mounting

For systems with reference points on the magnetic ring please take care that sensor and ring are aligned correctly (see picture).

Reference signal	O, I	R
A, Sensor/ring reading distance	≤0.4 mm	≤0.2 mm
B, Lateral offset	±2 mm	±0.5 mm
C, Alignment error	±3°	±1°
D, Longitudinal inclination	±1°	±1°
E, Lateral inclination	±3°	±3°

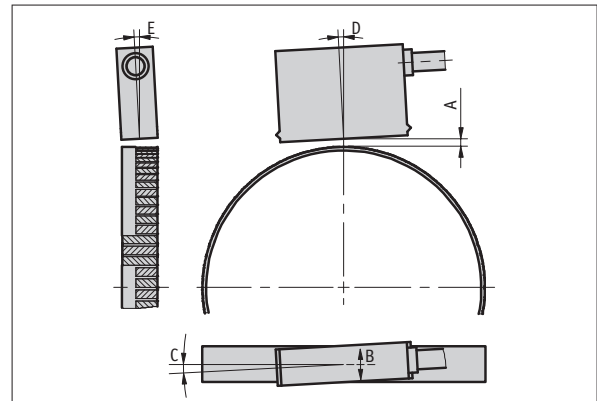

(symbolic sensor representation)

Order

Ordering information

one or more system components are required:

Magnetic band ring MBR100

www.siko-global.com

Ordering table

Feature	Ordering data	Specification	Additional information
Operating voltage	10	10.5 ... 30 V DC	
	5	5 V DC ±5 %	
Design	M	metal housing with status LEDs	
	ZM	metal housing without status LEDs	
Type of connection	E1	open cable end	
	E6X	bullet connector without mating connector	
		cable extension on request	
Cable length	...	1 ... 20 m, in steps of 1 m	
		others on request	
Reference signal	0	without	
	IA	periodic index (analog)	index signal every 1 mm
	ID	periodic index (digital)	index signal every 1 mm
	RB	fixed, tape side (analog)	
	RD	fixed, tape side (digital)	

Order key

LE100/1 rotativ - - - - -

A B C D E

Scope of delivery: LE100/1 rotativ, Mounting instructions, Fastening set